

## Commentary

# Toward carbon-neutral electricity and mobility: Is the grid infrastructure ready?

Le Xie,<sup>1,\*</sup> Chanan Singh,<sup>1</sup> Sanjoy K. Mitter,<sup>2</sup> Munther A. Dahleh,<sup>2,3</sup>  
and Shmuel S. Oren<sup>4</sup>

Dr. Le Xie is a Professor, Chancellor EDGES Fellow, and Presidential Impact Fellow in the Department of Electrical and Computer Engineering at Texas A&M, and the Assistant Director-Energy Digitization at Texas A&M Energy Institute. He was awarded the 2017 IEEE PES Outstanding Young Engineer Award for the best power engineer under 35. He is the founding chair of IEEE PES Subcommittee on Big Data & Analytics for Grid Operations.

Dr. Chanan Singh is Irma Runyon Chair Professor in Electrical and Computer Engineering at Texas A&M. He is a member of the U.S. National Academy of Engineering, a Foreign Fellow of the Indian National Academy of Engineering, and a Foreign Fellow of Chinese Society of Electrical Engineering. He is a Fellow of IEEE. He received the inaugural IEEE-PES Roy Billinton Power System Reliability Award. He received the 1998 Outstanding Power Engineering Educator Award given by the IEEE Power Engineering Society.

Dr. Sanjoy K. Mitter joined MIT in 1969 where he has been a Professor of Electrical Engineering since 1973. He was the Director of the MIT Laboratory for Information and Decision Systems from 1981 to 1999. Dr. Mitter was elected a Foreign Fellow of the Indian National Academy of Engineering. He is a Fellow of the IEEE and

IFAC. He is the winner of the 2000 IEEE Control Systems Award. In 1988, he was elected to the U.S. National Academy of Engineering.

Dr. Munther A. Dahleh is the founding Director of MIT's Institute for Data Systems and Society, and the William A. Coolidge Professor in Electrical Engineering and Computer Science. He is a four-time recipient of the George Axelby outstanding paper award for best paper in *IEEE Transactions on Automatic Control*. He is also the recipient of the Donald P. Eckman award from the American Control Council in 1993 for the best control engineer under 35. He is a Fellow of IEEE and a Fellow of IFAC.

Dr. Shmuel S. Oren is Professor of the Graduate School and the Earl J. Isaac Professor in the Science and Analysis of Decision Making in the Department of Industrial Engineering and Operations Research at the University of California at Berkeley and former Chairman of that department. He is a co-founder and the Berkeley site director, of PSerc—a multi-university Power Systems Research Center since 1996. He has also been a member of the California ISO Market Surveillance Committee. He is a Life Fellow of the IEEE, Fellow of INFORMS and a member of the U.S. National Academy of Engineering.

The electric power and transportation sectors are the two largest contributors to greenhouse gas emissions in the U.S. and in most other nations. A critical path toward carbon neutrality relies on decarbonizing electric power generation and simultaneously electrifying a major portion of the transportation sector. If successful, this path will fundamentally change the way energy is converted, delivered, and utilized for a sustainable society.

This piece takes an “electric grid-centric” viewpoint to directly address infrastructure changes that have long lead times and often pose public acceptance issues. A key challenge in the ambitious carbon neutral transition lies in the scale and speed of accomplishing this transformation. We address the following questions that underpin this global endeavor to grapple with climate change. Is today's electric infrastructure ready to facilitate such an ambitious decarbonization effort? If not, how should investments be prioritized to leverage feedback from vehicle electrification and further expand the electric infrastructure? This piece summarizes key challenges and opportunities in the electric grid sector as we make an ambitious transition toward carbon neutrality. We have written with two audiences in mind: (1) decision makers from government agencies and related stakeholders (e.g., Regional Transmission Organizations) and (2) climate challenge-aware young researchers who wish to make an impact in the electric grid sector. We argue that there exists a feedback loop between the electricity and transportation sectors. Whereas the electricity sector should plan for an aggressive electrified charging demand from the transportation sector, mobile batteries in cars can also be viewed as an important resource of energy during times of stressed grid conditions. How to design a coordinated incentive and

operational architecture between these two sectors remains a key intellectual challenge for the research and policy-making communities.

### Is today's electric grid infrastructure ready?

Based on a study by the U.S. Energy Information Administration, the leveled cost of electricity (with applicable tax and subsidies) of onshore wind and solar photovoltaic generation has reached economic parity with the natural gas combined cycle.<sup>1</sup> While this is very encouraging news for the argument of further decarbonizing by addressing the electricity and mobility sectors, it remains largely unclear regarding the readiness of today's electric grid infrastructure in facilitating such an ambitious decarbonization effort.

The discussions are motivated through a representative example. There has been increasing evidence on the impact of uncoordinated electric vehicle charging on the electric distribution grid such as transformer overloading at a modest level of EV penetration.<sup>2</sup> This is further exacerbated by the more stringent limits imposed by the electric distribution grid protection design, which assumes one-way power flow and very distinctive electric current patterns that could be used to separate normal from faulty conditions.<sup>2</sup> With aggressive vehicle electrification goals, there will be a lack of hosting capacity of today's distribution networks in handling massive distributed energy resources and EVs. Economic incentives and smart scheduling could offset the peak-to-valley ratio; however, even in the most optimistic case (i.e., a flattened total load curve), the limit of the substation transformers will still likely be exceeded. This will be further bottlenecked by protective relay settings that are not tuned for two-way power flow.<sup>3</sup>

At the bulk transmission power system level, challenges exist regarding how

to control and monitor dynamic swings induced by decarbonization and electrification. For example, there is increasing evidence in many regions of transient subsynchronous oscillations.<sup>4,5</sup> This is particularly challenging because it illustrates that even with installation of modern power electronics controllers and state-of-the-art transmission hardware technologies, there are still many challenges in real-time operation of large renewable generation, especially when they are far away from the load centers.

The above engineering examples illustrate how increasing interdependencies between mobility, renewable energy, and the electric grid infrastructure will render today's operation and design of the electric grid ill-prepared for the ambitious decarbonization goals. There are many more open questions. (1) How do we tap into the large wind resources, which may be far away from load centers, by using improved long-distance transmission? (2) How do we replace conventional generators with low carbon energy resources to provide all the grid services because of their differing characteristics? (3) How do we create scalable market mechanisms to ensure efficient and reliable electricity services with human-in-the-loop grid edge-level resources? (4) How do we value and protect data and computation assets for a carbon-neutral electricity and mobility infrastructure?

In the next section, we provide our comments about how to reinforce the infrastructure for such an ambitious decarbonization effort.

### How to prioritize electric grid expansion for carbon-neutral transition?

Recognizing the limitations of today's electric grid infrastructure in support of an ambitious carbon-neutral transition, we argue that a holistic approach will be needed to align the societal

choices, business incentives, and technological innovations in order to prioritize expansion of the electric infrastructure system. While logistically presented in a separate manner, these aspects are fundamentally intertwined and will synergistically contribute to enabling a more sustainable electric grid. There are indeed many experiences that can be learned from regions with deeper penetration of renewables;<sup>6</sup> however, to the best of our knowledge, how to reliably and cost-effectively integrate massive renewables with large amount of vehicle electrification at a continental scale remains an open question.<sup>7</sup> It is our sincere hope that this manuscript will generate more interest and attention to the "infrastructure" aspect of the climate solution.

We summarize the key research challenges below and substantiate them in the rest of the article.

1. Whereas conventional power grid dynamics are primarily dominated by inertia-driven physical interactions, carbon-neutral power grid dynamics will be primarily governed by the algorithmic control of power electronic inverters. What will be the proper algorithmic control protocol that would ensure the physical and cyber security of a large-scale stochastic dynamic system?
2. Whereas reliability performance of conventional power grids is conventionally achieved by diversification of location and technologies of generators with firming capacity (e.g., coal and natural gas), a carbon-neutral power grid will be supplied predominantly by generation that does not exhibit firming capacity. What will be the theory and cost-risk analysis of reliability performance of a power grid with deepening penetration of intermittent supply and demand?

3. From the market design perspective, what will the pricing construct be for uncertainty and flexibility in carbon-neutral electricity systems? A market for carbon-neutral electricity needs to charge resources that create uncertainty and reward resources that mitigate uncertainty by providing flexibility. Markets for flexibility and market clearing mechanisms that account for uncertainty will go a long way toward mobilizing demand side resources and edge technologies to provide reserves and accommodate renewables.
4. As the key resource that brings electric and transportation networks closer, mobile EVs require special attention. How could one imagine and construct a market for EV storage? Potentially, cars can travel to a location that has an outage and provide it with power. Such interaction puts an uber-like market on top of an electricity market.
5. At the foundational level, it remains far from clear what the proper architecture will be for the grid infrastructure that supports carbon-neutral electricity and mobility. It remains open research questions how to properly conceptualize, model, and analyze the interdependencies across multiple functional layers for such a complex power infrastructure ecosystem.

The electrification of the transportation sector undoubtedly requires attention to a wide range of transition, including heavy-duty, air traffic, as well as light-to medium-duty vehicles.

Whereas the primary motivator driving this change comes from decarbonization, the possible paths toward decarbonization may vary from region to region. We address some of the common infrastructure challenges that arise

from decarbonization. As a particular subset of research focus, a distributed approach to realizing the goal of decarbonization is of particular interest in this article. Therefore, we will highlight some of the unique research challenges and opportunities in distributed energy resources as society tackles deep decarbonization.

Starting from the infrastructure hardware perspective, substantial investments will be needed to expand the bulk transmission grid infrastructure in order to allow reliable delivery of abundant renewable resources to load centers. At the more local level, substantial investments are needed to modernize the control and protection of power distribution networks and to enable them to handle two-way AC power flow with much more overlapping patterns of normal versus abnormal operational conditions. A large portion of these investments will be needed for information gathering, coordination, and actuation (i.e., the “software/analytics” aspect) in order to maximize the hosting capacity of the power grid hardware. Much attention should be paid to the investment of new control/informatics in addition to wiring-and-transformer expansion.

It is important to stress the need to revisit power system reliability in the context of decarbonization. Electricity supply in the US and most developed nations has historically enjoyed a very high level of reliability. This has been ensured by detailed long-term planning against uncertainties stemming from equipment failures and load forecasting. Going forward to full decarbonization of the power grid will require penetration levels of renewable energy that today's power industries have no experience with.<sup>8–10</sup> If reliability is to be maintained at the customary levels, considerable long-term planning with reliability in mind needs to be done to understand these issues and find solutions. Typically,

maintaining reliability in the presence of variable energy can be achieved by geographical diversification and resource diversification, including storage and flexible demand strategies. These strategies need to be studied, planned, and executed by performing simulations long before actual implementation. As an example, for global diversification, suitable transmission facilities need to be built, which will entail extensive lead times. Energy storage will provide value to both the short-term power swing and the longer-term power availability challenges. Storage requirements will be substantial and may have consequences like disposal and cycling. It is worth stressing that reliability can be maintained, but successfully doing so requires working out these strategies and implementing them over a long period of time. All aspects need to be thoughtfully considered before plunging into the wholesale conversion to renewables. The nature of this problem is complex, both structurally and computationally, and there will be an increasing need for real-time decisions. It is not possible just to replace conventional energy sources with renewables without ameliorating consequences of the variability of these resources. All this is made more difficult in the absence of a central planning entity.<sup>11</sup>

From the business and market perspective, it is important to recognize that electricity market design varies significantly across different regions. Markets provide mechanisms for regulating consumption or sharing distributed resources. If designed well, they can have serious impact on the (physical) infrastructure requirements. As much promise as renewable energy and storage technologies may offer, the complicated and oftentimes conflicting interests within the electricity ecosystem in most regions makes the adoption of technology much more complex than a single top-down decision-making process. Conventional utility business models based on volumetric

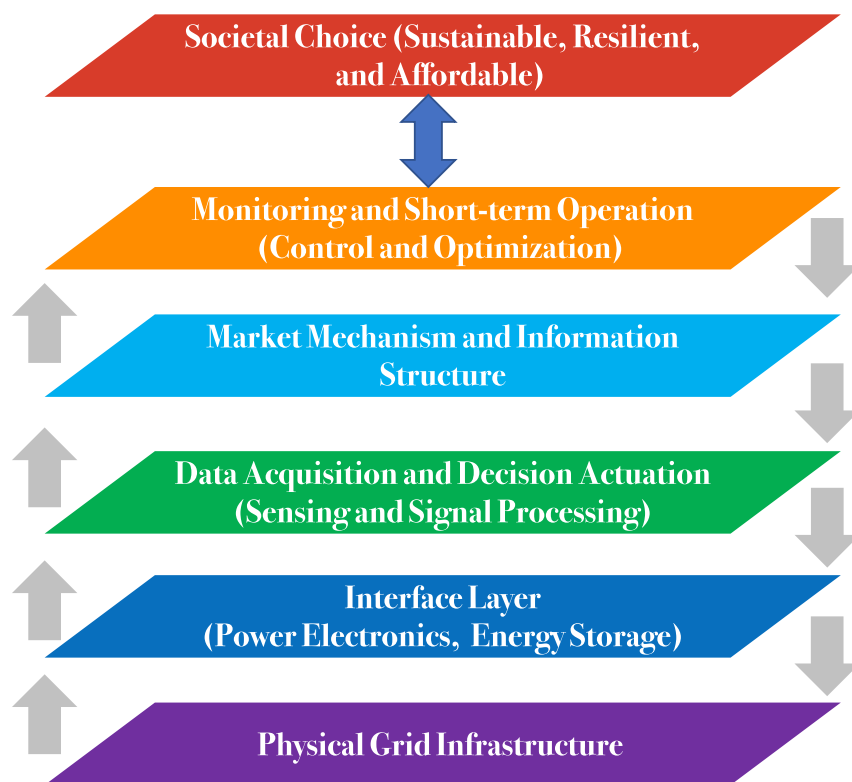


Figure 1. A possible architecture of the future grid

charges at mostly fixed rates are rendered much less conducive toward large-scale adoption of grid-edge distributed energy resources such as solar and EVs. From an implementation point of view, it is imperative to allow new business models and incentive structures be tried out in different localities. “Learning by doing” is a most pragmatic approach to stimulate technological adoption and market acceptance at the customer end. As a crucial ingredient for scalable adoption of energy storage, we argue that EVs can be assets as opposed to constraints during this transition. With the emerging technologies that will allow for charging and discharging batteries while idle, EVs can become a major storage asset with spatial and temporal distribution.

It is worth pointing out that, as a key component which couples the electricity and mobility sectors, mobile electric loads from vehicle charging will likely be a game-changer for infra-

structure expansion in technological, business, and regulatory aspects. The commitment to produce 100% EVs by 2035 from major car manufactures such as General Motors will accelerate the infrastructure’s adoption of new technologies as well as market constructs to not only serve these mobile demands, but to actively exploit their flexibilities and meet the increasing intermittency from renewables.<sup>12</sup> In this context, planning for expansion of the infrastructure will need thoughtful coordination between the electricity and transportation sectors.

At a more fundamental level, it requires extensive research efforts to properly conceptualize, model, and analyze the interdependencies across functional layers for such a complex power infrastructure ecosystem. It is our conjecture that a qualitatively different architecture is required to synthesize the cyber, physical, and societal interdependencies for electric infrastructure sys-

tems. While it still remains an open question as to which architecture would eventually prevail in the energy transition, here we postulate a functionally layered architecture for a massively digitized and decarbonized power grid. We take inspiration from some of the classical works in data communication networks and distributed control<sup>13,14</sup> to visualize one possible architecture as shown in Figure 1. It illustrates the interdependencies that underpin the carbon-neutral electricity delivery ecosystem. Each horizontal layer represents a functional decomposition of the ecosystem. The arrows refer to the interactions across two adjacent functional layers. The interaction variables between adjacent layers encapsulate the key functional features of a given layer. What distinguishes this architecture from the present operational practice is that conventional architecture rests on the premise of a centralized hierarchical information and decision-making framework,<sup>15</sup> whereas the future grid operating architecture will have to be much more interactive between producers and consumers (prosumers), and information flow becomes more distributed. An example would be that vehicle-to-grid services would imply very different information flow (two-way) as compared to that of deferrable charging (one way). Risk requirement coming from societal choices would dictate the design of redundancy, or reserve. Carbon requirement impacts the renewable penetration, which then impacts the infrastructure design. We believe that one cannot talk about infrastructure upgrades without talking about markets and regulation. A well-designed architecture for the future grid will need to address the five issues raised at the beginning of this section.

When it comes to implementation paths toward carbon-neutral goals, our perspective is that societal choice, the top layer of the architecture, will most likely dictate the outcome. There

are many possible paths to achieve the eventual objective of carbon neutrality. These paths will likely vary from region to region because of the structure of the US power grid and variations in local energy resources. The “endgame” of carbon neutrality might have more than one scenario. With the deepening level of renewables, energy storage, carbon capture, utilization and storage, and behind-the-meter rooftop PVs, planning and operation strategies may need to be revisited and extensive research and development will be needed to plan for the transition from the current status to the endgame.

The current structure of regional transmission organizations’ lack of an overall planning and executive authority plus social activism makes the transmission grid expansion very challenging.<sup>4</sup> Because of lack of this central authority, it remains far from clear how and whether a national transmission overhaul project will be feasible to facilitate the large amounts of renewable integration from wind and solar resource centers. Given the complex and interconnected nature of electricity flows, it makes technical sense to have a coordinated approach to evaluating the overall electric infrastructure, especially given the vast geographical diversity of energy resources and population/demand mixtures in the U.S.

## ACKNOWLEDGMENTS

The authors thank comments from the anonymous reviewers that have substantially improved the quality of this article. L.X. and S.K.M. would like to thank Dr. David D. Clark of MIT for the informative discussion. The work of L.X. is supported in part by U.S. Na-

tional Science Foundation Grants ECCS-1839616, ECCS-2038963, OAC-1934675, and ECCS-2035688, Department of Energy Contract DE-EE0009031, and Breakthrough Energy. The work of C.S. is supported in part by U.S. Department of Energy under Award DE-IA0000025 for UI-ASSIST Project.

## AUTHOR CONTRIBUTIONS

L.X. initiated and wrote the article. C.S., S.K.M., M.A.D., and S.S.O. participated in the writing and discussion of this article.

1. U.S. Energy Information Administration (2020). Levelized Cost and Levelized Avoided Cost of New Generation Resources in the Annual Energy Outlook 2020. [https://www.eia.gov/outlooks/aeo/pdf/electricity\\_generation.pdf](https://www.eia.gov/outlooks/aeo/pdf/electricity_generation.pdf).
2. Muratori, M. (2018). Impact of uncoordinated plug-in electric vehicle charging on residential power demand. *Nat. Energy* 3, 193.
3. Wu, D., Zheng, X., Kalathil, D., and Xie, L. (2019). Nested Reinforcement Learning Based Control for Protective Relays in Power Distribution Systems. In IEEE Conference on Decision and Control (CDC). <https://doi.org/10.1109/CDC40024.2019.9029268>.
4. IEEE Wind SSO Task Force (2020). Wind Energy Systems Sub-Synchronous Oscillations: Events and Modeling, Technical Report (IEEE).
5. Shair, J., Xie, X., Liu, W., Li, X., and Li, H. (2021). Modeling and stability analysis methods for investigating subsynchronous control interaction in large-scale wind power systems. *Renew. Sustain. Energy Rev.* 135, 110420.
6. Zappa, W., Junginger, M., and van den Broek, M. (2019). Is a 100% renewable European power system feasible by 2050? *Appl. Energy* 233–234, 1027–1050. <https://doi.org/10.1016/j.apenergy.2018.08.109>.
7. Brown, P.R., and Botterud, A. (2020). The Value of Inter-Regional Coordination and Transmission in Decarbonizing the US Electricity System. *Joule* 5, 115–134.
8. Mathiesen, B.V., Lund, H., Connolly, D., Wenzel, H., Østergaard, P.A., Möller, B., Nielsen, S., Ridjan, I., Karnøe, P., Sperl, K., and Hvelplund, F.K. (2015). Smart Energy Systems for coherent 100% renewable energy and transport solutions. *Appl. Energy* 145, 139–154.
9. Taylor, J., Dhople, S., and Callaway, D. (2016). Power systems without fuel. *Renew. Sustain. Energy Rev.* 57, 1322–1336.
10. Kroposki, B., Johnson, B., Zhang, Y., Gevorgian, V., Denholm, P., Hodge, B.M., and Hannegan, B. (2017). Achieving a 100% renewable grid: Operating electric power systems with extremely high levels of variable renewable energy. *IEEE Power Energy Mag.* 15, 61–73.
11. Joskow, P.L. (2020). Transmission capacity expansion is needed to decarbonize the electricity sector efficiently. *Joule* 4, 1–3.
12. Falahi, M., Chou, H., Ehsani, M., Xie, L., and Butler-Purry, K.L. (2013). Potential Power Quality Benefits of Electric Vehicles. *IEEE Transactions on Sustainable Energy* 4, 1016–1023.
13. Shannon, C.E. (1948). A mathematical theory of communication. *Bell Syst. Tech. J.* 27, 379–423.
14. Bertsekas, D.P., and Gallager, R.G. (1992). *Data Networks*, Volume 2 (Prentice-Hall International).
15. Dy Liacco, T.E. (1967). The adaptive reliability control system. *IEEE Trans. Power Apparatus Syst* 5, 517–531.

<sup>1</sup>Department of Electrical and Computer Engineering, Texas A&M University College of Engineering, 3127 TAMU, College Station, TX 77843, USA

<sup>2</sup>Laboratory for Information and Decision Systems, Massachusetts Institute of Technology, 77 Massachusetts Avenue, Cambridge, MA 02139, USA

<sup>3</sup>Institute for Data Systems and Society, Massachusetts Institute of Technology, 77 Massachusetts Avenue, Cambridge, MA 02139, USA

<sup>4</sup>Science and Analysis of Decision Making, Department of Industrial Engineering and Operations Research, University of California at Berkeley, Berkeley, CA 94720, USA

\*Correspondence: [le.xie@tamu.edu](mailto:le.xie@tamu.edu)  
<https://doi.org/10.1016/j.joule.2021.06.011>